



**POWERFUL
& FASTER**

FP861 NEW PNEUMATIC HAND SHEAR

FP861. The universal cutting tool for industry.



1946



WHAT'S NEW:

Central back-located air exhaust
 +10% power
 +10% torque
 High manageability in 1100 g

FOLLOW US:




RASOR ELETTROMECCANICA SRL

Via Vincenzo Caldesi 6 • 20161 Milan • Italy
 ph. +39 02 66 22 12 31 • fax +39 02 66 22 12 93
 info@rasor-cutters.com


www.rasor-cutters.com

NEW PNEUMATIC HAND SHEAR FP861



TECHNICAL DETAILS:

Muffled turbine motor with central back-located air exhaust
 6 bar nominal* (± 1 bar) lubricated air supply
Air consumption: 9 std liters/sec*
Power: 400 W at nominal air supply conditions
Blade: 86 mm with hard metal counterblade
Blade descr.: 86THSS, 86 mm dia., 8-edge, HSS steel
Blade speed: 900 r.p.m.*
Cutting ability: up to 25 mm
Sound pressure: 72 dBe (EN ISO 15744)*
Vibration Level: 1,36 m/sec² (ISO 8662)*
Net weight: 1100 g
Total weight (with packing): 1995 g
Temperature range: 0 – 55 C
Umidity range: 10 – 95% without condensate

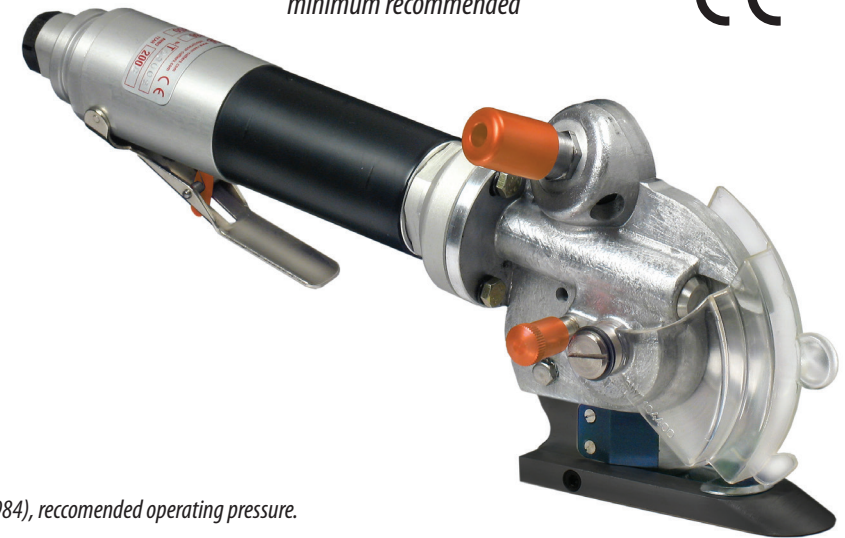

*The reported data are collected at a pressure of 6 bar (ISO 2787: 1984), recommended operating pressure.



Rasor recommend to use only dry air lubricated
 with special Rasor VG 5 pneumatic oil



BLADES AVAILABLE:

86PHSS, 86 mm 5-edges, HSS steel
86THSS, 86 mm 8-edges, HSS steel
86PHSSTF, 86 mm 5-edges, HSS steel
 Teflon® coated | **86THSSTF**, 86 mm 8-edges,
 HSS steel Teflon® coated | **86THSSTN**, 86 mm
 8-edges, HSS steel Titanium coated | **86TMD**,
 86 mm 8-edges, Carbide (Widia®)